


# Ultra-High Pressure Air Pump

▼ ATP-1500



- General purpose, high pressure air driven two speed pump unit for products requiring up to 1500 bar hydraulic pressure
- Compact, lightweight, rugged steel frame for protection and easy handling
- Prelubricated pump element, does not require an airline lubricator
- Easily adjustable output pressure control
- Integrated and protected easy to read glycerin filled gauge
- Safety relief valve limits output pressure.

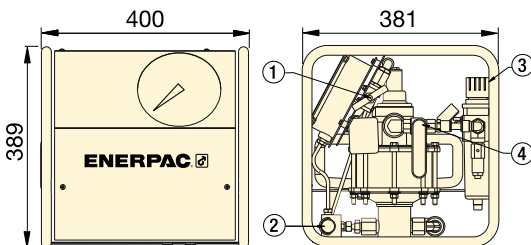

- ① Shut-off Valve
- ② Outlet Port 1/4" BSPM with BR-150 female coupler
- ③ Filter/Regulator
- ④ Air On/Off Valve  
Air Inlet 1/2" NPTF

## ATP Series

Reservoir Capacity:  
**3,8 litres**

Flow at Rated Pressure:  
**0,07 l/min**

Maximum Operating Pressure:  
**1500 bar**



This pump operates at ultra-high pressure, use only the specified fittings and hoses designed for these pressures.

Page: 53



### Applications

The Enerpac ATP-Series air pump is ideally suited for use with hydraulic bolt tensioning tools and hydraulic nuts.

Page: 44



### ATEX Certified


The ATP-Pump is tested and certified according ATEX.




II 2 GD ck T4

Page: 68

### OIL FLOW VERSUS PRESSURE

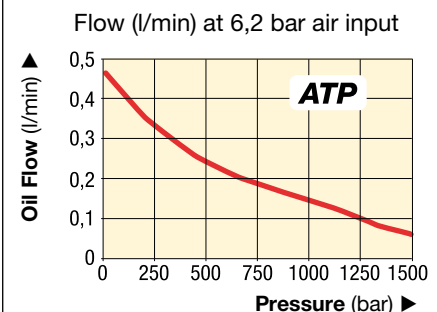

### 1500 bar HIGH PRESSURE AIR PUMP

Pump Type	Useable Oil Capacity (litres)	Pressure Rating (bar)	Model Number	Output Flow Rate at 0 bar (l/min)	Output Flow Rate at 1500 bar (l/min)	Air Pressure Range (bar)	Air Consumption (l/min)	Sound Level (dBA)	 (kg)
Two speed	3,8	1500	<b>ATP-1500</b>	0,43	0,07	5,5 - 6,2	594	70	32