

RE 25 818/03.03

Replaces: 07.02 and 02.03

**Pressure relief valve,
pilot operated,
Type DB(W)...W65**

Nominal sizes 10 and 25

Series 1X; 4X

Max. operating pressure 350 bar

Max. flow 400 L/min

K4643-16



Type DB 10 -1-4X/..W65

HAD 6964



Type DBW 20 AG2-4X/... 6E...W65

K4601-14



Type DB 20 K1-4X/...XY

Overview of contents

Contents	Page
Features	1
Ordering details	2
Design tested pressure relief valves	3
Symbols	4
Function, section	4
Technical data	5, 6
General guidelines	6
Plug-in connector	6
Characteristic curves	7
Unit dimensions	8 to 11
Installation cavities	11
Preferred types	12

Note:

Design tested pressure relief valves to pressure component directive 97/23/EG (abbreviated to DGRL in any further text) **type DB 20 K../..E, series 1X, for ordering details see page 3.**

Features

- For subplate mounting
- Porting pattern to DIN 24 340 form E, ISO 6264 -AR-06-2-A (NS 10), ISO 6264 -AR-08-2-A (NS 25) and CETOP-RP 121 H, Subplates to catalogue sheet RE 45 065 (separate order)
- For threaded connections
- As a cartridge valve
- 4 adjustment elements:
 - Rotary knob
 - Sleeve with hexagon and protective cap
 - Lockable rotary knob with scale
 - Rotary knob with scale
- 5 pressure stages
- Solenoid operated unloading via a built-on directional valve (only with threaded connections)
- For further information regarding the pilot valve see: High performance directional valve to RE 23 178



© 2003

by Bosch Rexroth AG, Industrial Hydraulics, D-97813 Lohr am Main

All rights reserved. No part of this document may be reproduced or stored, processed, duplicated or circulated using electronic systems, in any form or by means, without the prior written authorisation of Bosch Rexroth AG. In the event of contravention of the above provisions, the contravening party is obliged to pay compensation.

Ordering details

DB																									*				
Pressure relief valve = DB																												Further details in clear text	
Without directional valve = No code																												Design tested: No code = Without E = Safety valve with design testing to DGRL 97/23/EG W65 = Vertical cartridge (ordering details are not required for cartridge valve "K")	
With built-on directional valve = W ¹⁾																													
NS	Ordering details																												
	Subplate mounting „-“	Threaded connection „G“	Cartridge valve „K“																										
10	= 10	= 10 (G 1/2)																											
25		= 15 (G 3/4)																											
	= 20	= 20 (G 1)	= 20																										
				Normally closed = A ²⁾																									
				Normally open = B ²⁾																									
For subplate mounting				= -																									
For threaded connections				= G																									
As a cartridge valve (cartridge)				= K																									
Adjustment element																													
Rotary knob				= 1																									
Sleeve with hexagon and protective cap				= 2																									
Lockable rotary knob with scale				= 3 ³⁾																									
Rotary knob with scale				= 7																									
Series 10 to 19 (only version "K")				= 1X																									
(10 to 19: unchanged installation and connection dimensions)																													
Series 40 to 49				= 4X																									
(40 to 49: unchanged installation and connection dimensions)																													
Settable pressure up to 50 bar				= 50																									
Settable pressure up to 100 bar				= 100																									
Settable pressure up to 200 bar				= 200																									
Settable pressure up to 315 bar				= 315																									
Settable pressure up to 350 bar (only version DB)				= 350																									
Pilot oil supply and pilot oil drain																													
Internal pilot oil supply and pilot oil drain				= - ⁵⁾																									
External pilot oil supply, internal pilot oil drain				Also see = X																									
Internal pilot oil supply, external pilot oil drain				symbols = Y																									
External pilot oil supply and pilot oil drain				on page 4 = XY																									
																						1) Only for valve with threaded connections							
																						2) Only version DBW..G..							
																						3) H-key to Material No. R900008158 is included within the scope of supply							
																						4) Version "U" is not suitable for a							

**Preferred types, see page 12,
are readily available!**

- 1) Only for valve with threaded connections
- 2) Only version DBW..G..
- 3) H-key to Material No. **R900008158** is included within the scope of supply
- 4) Version "U" is **not** suitable for a cross-relief function!
- 5) Hyphen „-“ **only** required for DBW..G .. without stating details regarding X, Y, XY, and U.
- 6) Plug-in connectors must be ordered separately (see page 6).

⚠ Attention!

When ordering spare cartridges for subplate mounting or threaded connection housings NS 10 and 25 **always** order type DB 20 K.-1X/..XY!
Design tested safety valves are **only** available for type DB 20 K.-1X/..YE!

Ordering details for design tested pressure relief valves type DB..K../..E, series 1X

Design tested to directive 97/23/EG (pressure component directive)

NS	Designation	Component identification	Max. permissible flow q_{Vmax} in L/min	Set response over pressure p in bar
25	DB 20 K <input type="text"/> ¹ -1X/ <input type="text"/> ² Y <input type="text"/> ³ E	TÜV.SV. <input type="text"/> -1001.14,4.F.G.p	70 100 150 200 300	30 to 60 61 to 110 111 to 210 211 to 315 316 to 350

- ¹ Adjustment element hand wheel = 1
(sealed pressure adjuster, unloading or adjustments in the lower settable range is possible!)
Adjustment element with sealed protective cap = 2
(no adjustment or unloading is possible)
- ² The pressure details contained within the type code are to be entered by the customer e.g. = 150
Pressure adjustments ≥ 30 bar and in 5 bar steps are possible.
- ³ NBR seals = No code
FKM seals = V
- Details are completed by the factory

Safety guidelines for design tested safety valves type DB..K../..E, series 1X to the pressure component directive DGRL 97/23/EG


- Before ordering a design tested pressure relief valve, checks have to be carried out to ensure that at the required **response pressure p** the maximum permissible **flow q_{Vmax}** (= numerical value in the place of the „G“ within the component identification) of the safety valve is greater than the maximum possible flow from the system. The appropriate regulations must be taken into account!
- In accordance to DGRL 97/23/EG the system pressure must not increase, due to the flow, by more than 10% of the set response pressure (see component identification).
 - The maximum permissible flow stated within the component identification **must not be exceeded**.
 - The return lines from safety valves must vent in a safe manner. Fluid must **not** be able to gather in a venting system (see the AD2000 -A2 information sheet).



Application notes must be taken into account!

- The response value stated within the component identification is set in the manufacturing plant with a flow of 2 L/min.
- The maximum permissible flow stated within the component identification is valid for:
 - Pilot oil return **“external”** (= Y in the order code) **without back pressure** in the **pilot oil return line Y**, the permissible back pressure in the return line (port T) < 10 bar
- The removal of the seal from a safety valve invalidates the DGRL approval
- Cavities (see page 11): Drilling „XY“ **without** port X
- The requirements of the pressure component directive and the AD2000-A2 information sheet must be taken into account!

Symbols

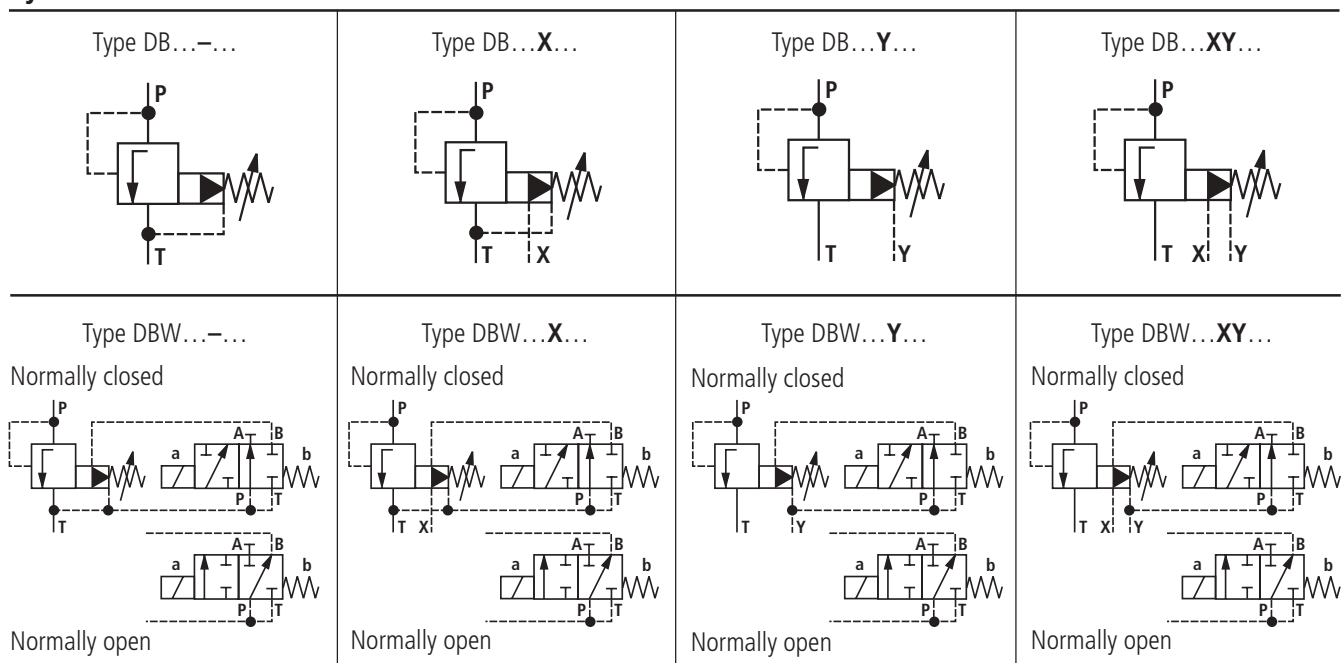

Function, section

Types DB and DBW valves are pilot operated pressure relief valves of cartridge design. They are used for limiting (DB) or limiting and solenoid operated unloading (DBW only with threaded connections) of an operating pressure.

The valves basically consists of the housing (1) and a pressure control valve cartridge (2).

The pressure present in port P acts on the spool (3). At the same time pressure is applied to poppet (6) via orifice drillings (4 and 5). When the pressure port P exceeds the force set on the spring (7), the poppet (6) opens against the spring (7).

Pressure fluid can now flow from port P via the orifice drillings (4 und 5) into the spring chamber (8). From here the fluid is led internally, with type DB...4X/.., via control passages (9 and 10) or externally, with type DB...4X/..Y.., via control passages (9 and 11) to the tank.

Due to the balanced condition at the poppet (3) pressure fluid flows from port P to port T, while maintaining the set operating pressure.


A pressure gauge connection (12) allows the operating pressure to be monitored.

The pressure relief valve can be unloaded or switched over to another pressure value (second pressure stage) via port "X" (13).

Pressure relief valve type DBW (only threaded connections)

In principle, the function of this valve corresponds to that of the valve type DB.

Unloading of the main poppet is achieved by controlling the built-on directional valve.

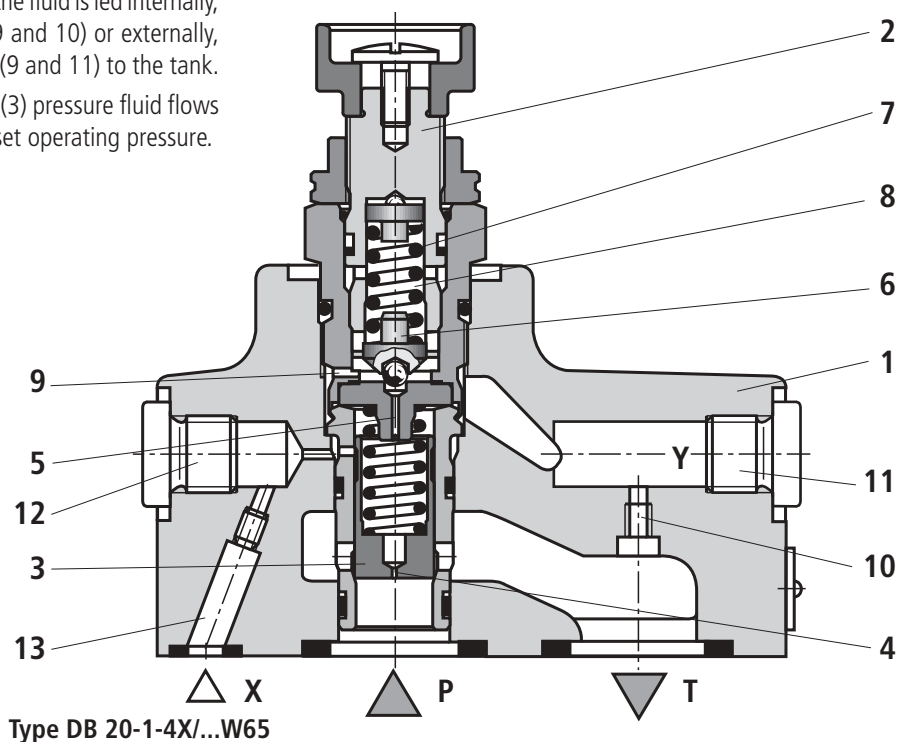

Technical data (for applications outside these parameters, please consult us!)**General**

Installation				Optional	
Ambient temperature range	Type DB..	°C	– 30 to + 80 (NBR seals)		
			– 15 to + 80 (FKM seals)		
	Type DBW..G..	°C	– 30 to + 50 (NBR seals)		
			– 15 to + 50 (FKM seals)		
The minimum housing material strength				Housing materials are to be so selected that adequate safety is ensured for all conceivable operating pressures (e.g. with reference to the compressive strength, thread strength and tightening torques).	
Weight			NS	10	25
	Subplate mounting		kg	1.6	2.3
	Threaded connections	Type DB..	kg	2.95	2.95
		Type DBW..	kg	4.25	4.25
	Cartridge valve (cartridge)		kg	–	0.35
Directional valve technical data				See catalogue sheet RE 23 178	

Hydraulic (measured with HLP 46, $\vartheta_{oil} = 40\text{ °C} \pm 5\text{ °C}$)

Max. operating pressure,	Ports P, X	bar	350	
	Port T	bar	315	
Max. back pressure: Port Y	Type DB..	bar	250	
Port Y (DBW..G../..Y) or port T (DBW..G../..)		bar	210 for a DC solenoid	
			160 for an AC solenoid	
Settable pressure	Min.	bar	Dependent on q_v , see characteristic curves on page 5	
	Max.	bar	Up to 50, Up to 100, Up to 200, Up to 315; (Up to 350 only version DB)	
Maximum flow	NS		10	25
	Subplate mounting	L/min	200	400
	Threaded connections	L/min	150	200 (G 3/4); 300 (G 1)
Pressure fluid			Mineral oil (HL, HLP) to DIN 51 524 ¹⁾ ; Fast bio-degradable pressure fluids to VDMA 24 568 (also see RE 90 221); HETG (rape seed oil) ¹⁾ ; HEPG (polyglycole) ²⁾ ; HEES (synthetic ester) ²⁾ ; other seals on request	
Pressure fluid temperature range		°C	– 30 to + 80 (NBR seals)	
			– 15 to + 80 (FKM seals)	
Vsicosity range		mm²/s	10 to 800	
ISO code cleanliness class			Maximum permissible degree of contamination of the pressure fluid is to ISO 4406 class 20/18/15 ³⁾	

¹⁾ Suitable for NBR **and** FKM seals²⁾ **Only** suitable for FKM seals

³⁾ The cleanliness class stated for the components must be adhered too in hydraulic systems. Effective filtration prevents faults from occurring and at the same time increases the component service life.
For the selection of filters see catalogue sheets RE 50 070, RE 50 076 and RE 50 081.

Deviating technical data for design tested pressure relief valves ¹⁾

Hydraulic

Maximum back pressure	Port Y	bar	0
	Port T	bar	10
Maximum flow			See tables on page 3
Pressure fluid			Mineral oil (HL, HLP) to DIN 51 524 and DIN 51 525
Pressure fluid temperature range		°C	– 20 to + 60 (for NBR seals)
			– 15 to + 60 (for FKM seals)
Viscosity range		mm ² /s	12 to 230

¹⁾ For applications outside these parameters, please consult us!

General guidelines

- The unloading function (directional valve function with DBW) must **not** be used for safety functions !
- With type DBW..**B**..4X/... the lowest settable pressure is set (circulation pressure) if the current fails or if there is a cable break.
With type DBW..**A**..4X/... the pressure relief function is activated if the current falls or if there is a cable break.
- Any hydraulic back pressure in port T with an internal pilot oil drain (type DB/DBW../... or port Y with an external pilot oil drain (type DB/DBW../...Y.) are added 1:1 to the response pressure set at the pilot control of the valve.



Example:


The valve pressure setting resulting from the spring loading
(Pos. 7 on page 4) in the
pilot control valve/adjustment unit $p_{\text{spring}} = 200 \text{ bar}$

Hydraulic back pressure in port T with internal
pilot oil drain $p_{\text{hydraulic}} = 50 \text{ bar}$

=> Response pressure = $p_{\text{spring}} + p_{\text{hydraulic}} = 250 \text{ bar}$

Ordering details: plug-in connectors to DIN EN 175 301-803 and ISO 4400 for component plug "K4"



For further plug-in connectors see RE 08 006					
		Material No.			
		Without circuitry	With indicator light 12 ... 240 V	With rectifier 12 ... 240 V	With indicator light and Z-diode protective circuitry 24 V
Valve side	Colour				
a	Grey	R900074683	—	—	—
a/b	Black	—	R900057292	R900313933	R900310995

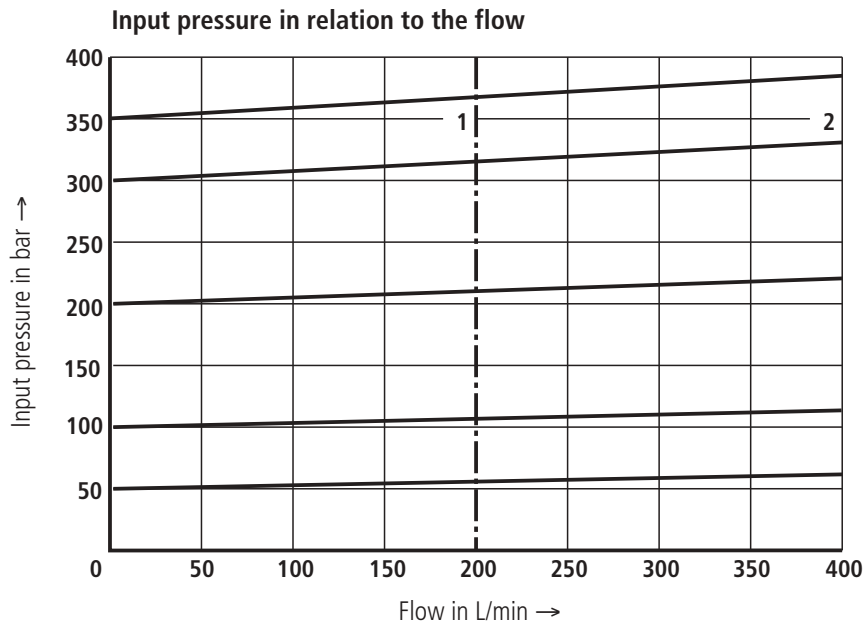



These characteristic curves were measured with external pilot oil drain at zero pressure. With an internal pilot oil drain, the input pressure increases by the output pressure present in port T.

Minimum settable pressure and bypass pressure in relation to the flow ¹⁾

Subplate mounting

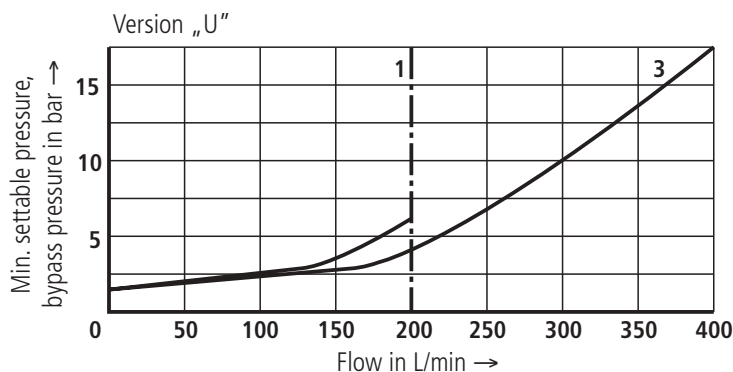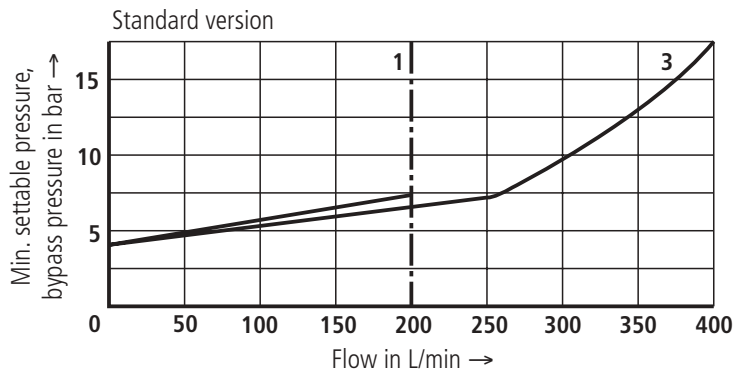


Threaded connections and cartridge valve

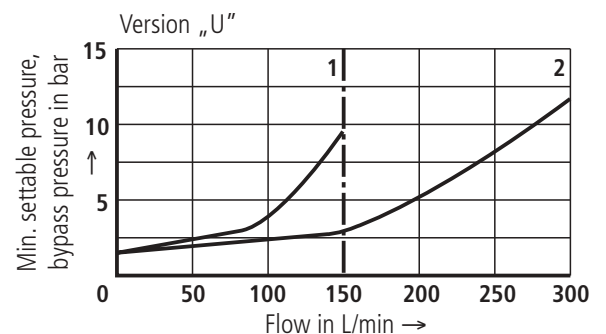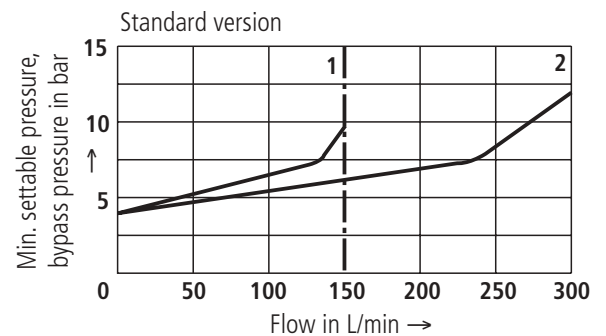

¹⁾ The characteristic curves are valid for an output pressure = zero over the entire flow range!

- 1 NS 10
- 2 NS 15 / NS 20
- 3 NS 20

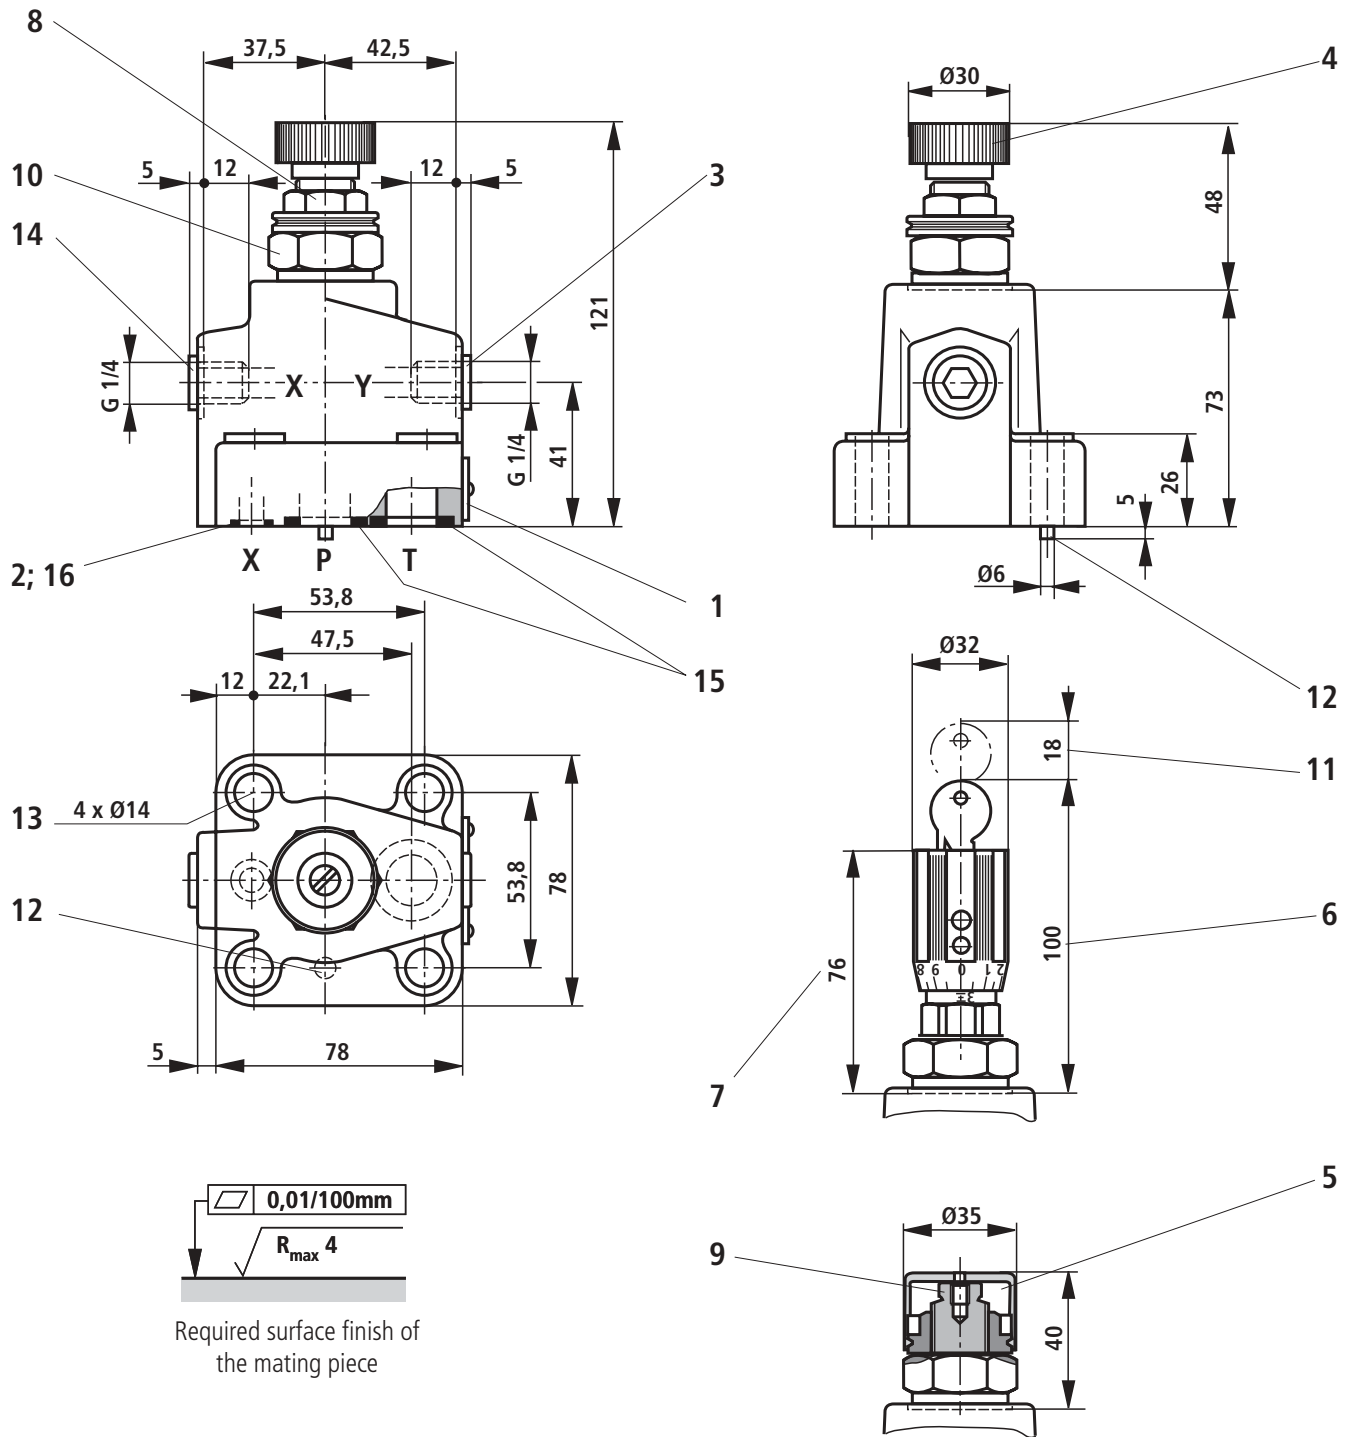

- | | |
|---|--|
| 1 Name plate | 10 Hexagon 30A/F
Tightening torque
$M_A = 50 \text{ Nm}$ |
| 2 Port X for remote control
(optional) | 11 Space required to remove the key |
| 3 Port Y for external pilot oil drian | 12 Locating pin |
| 4 Adjustment element "1" | 13 Valve fixing holes |
| 5 Adjustment element "2" | 14 Pressure gauge connection |
| 6 Adjustment element "3" | 15 Identical seal rings for
ports P and T |
| 7 Adjustment element "7" | 16 Seal ring for port X |
| 8 Locknut 22A/F | |
| 9 Hexagon 10A/F | |


Subplates to catalogue sheet
RE 45 064 and valve fixing screws must be
ordered separately.

Subplates G 545/01 (G 3/8)¹⁾
G 546/01 (G 1/2)¹⁾
G 565/01 (G 3/4)¹⁾

Valve fixing screws

M12 x 50 DIN 912-10.9, $M_A = 130 \text{ Nm}$

¹⁾ It is **not** permissible to use the stated
subplates with design tested valves!

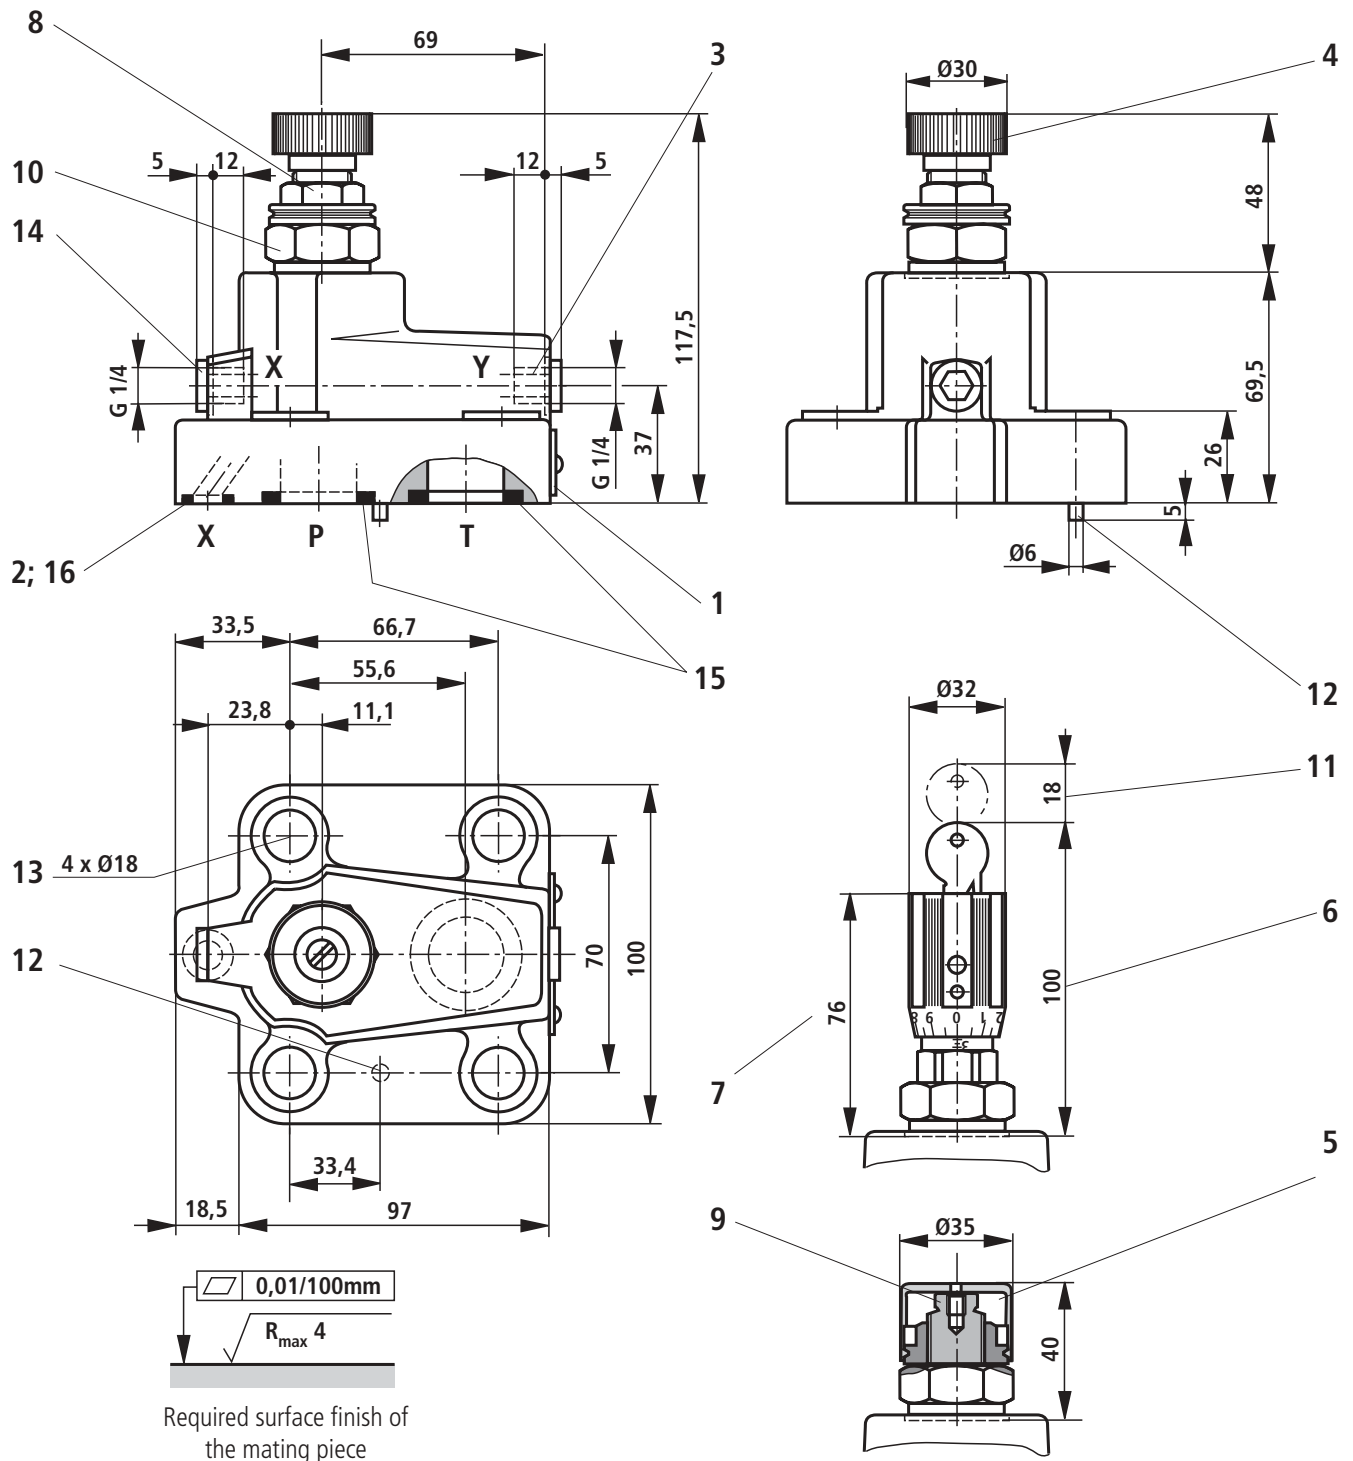

- | | |
|--|--|
| 1 Name plate | 10 Hexagon 30A/F
Tightening torque $M_A = 50 \text{ Nm}$ |
| 2 Port X for remote control
(optional) | 11 Space required to remove the key |
| 3 Port Y for external pilot oil drain | 12 Locating pin |
| 4 Adjustment element "1" | 13 Valve fixing screws |
| 5 Adjustment element "2" | 14 Pressure gauge connection |
| 6 Adjustment element "3" | 15 Identical seal rings for
ports P and T |
| 7 Adjustment element "7" | 16 Seal ring for port X |
| 8 Locknut 22A/F | |
| 9 Hexagon 10A/F | |

Subplates to catalogue sheet
RE 45 064 and valve fixing screws must be
ordered separately.

Subplates G 408/01 (G 3/4) ¹⁾
G 409/01 (G 1) ¹⁾


Valve fixing screws

M16 x 50 DIN 912-10.9, $M_A = 310 \text{ Nm}$


1) It is **not** permissible to use the stated subplates with design tested valves!

Unit dimensions: threaded connections (dimensions in mm)

Valve type	D1	Ø D2
DB.10.G	G 1/2	34
DB.15.G	G 3/4	42
DB.20.G	G 1	47

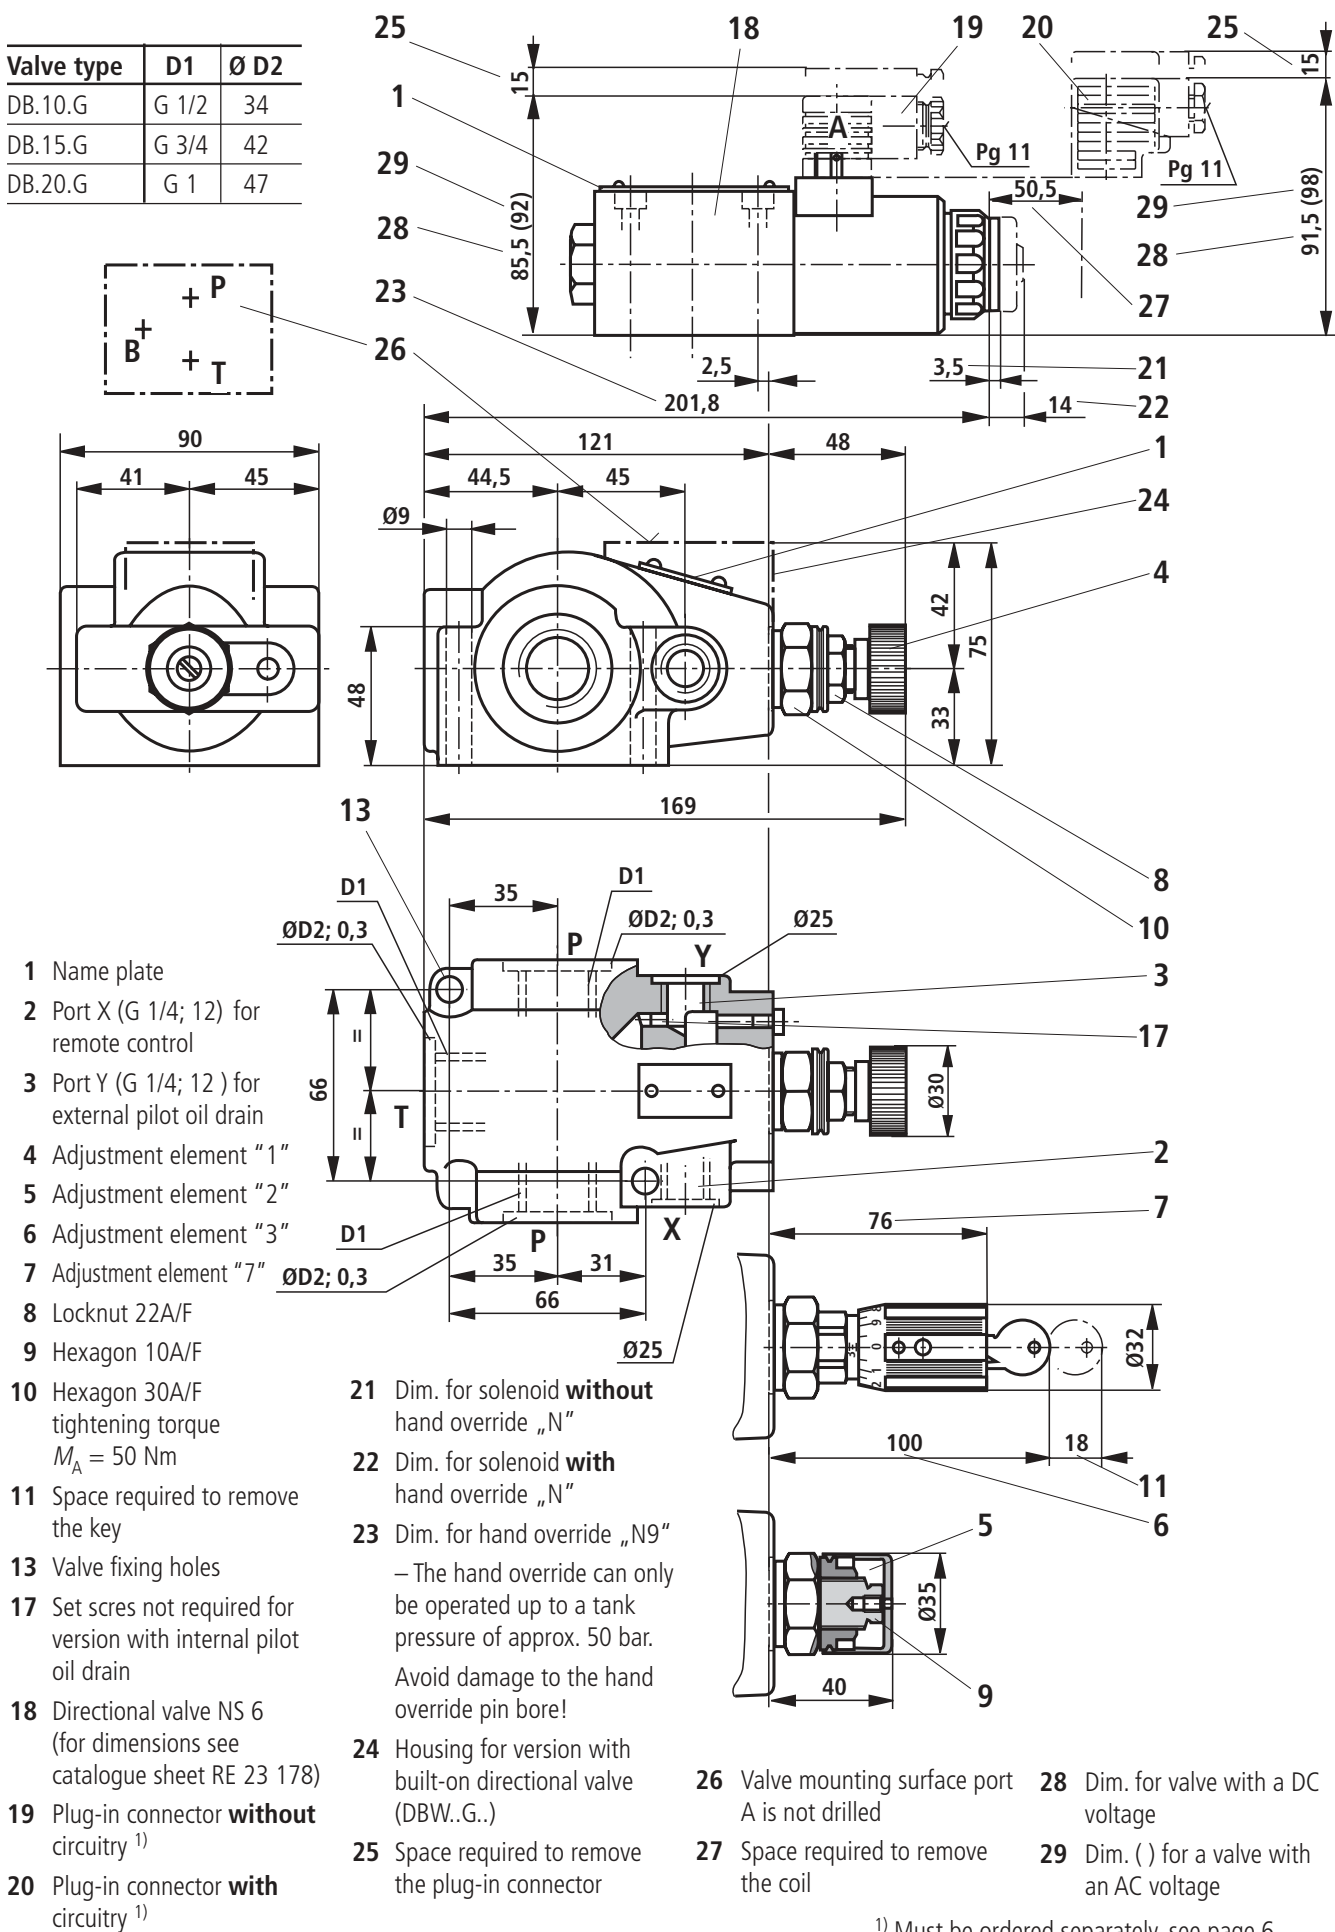


¹⁾ Must be ordered separately, see page 6

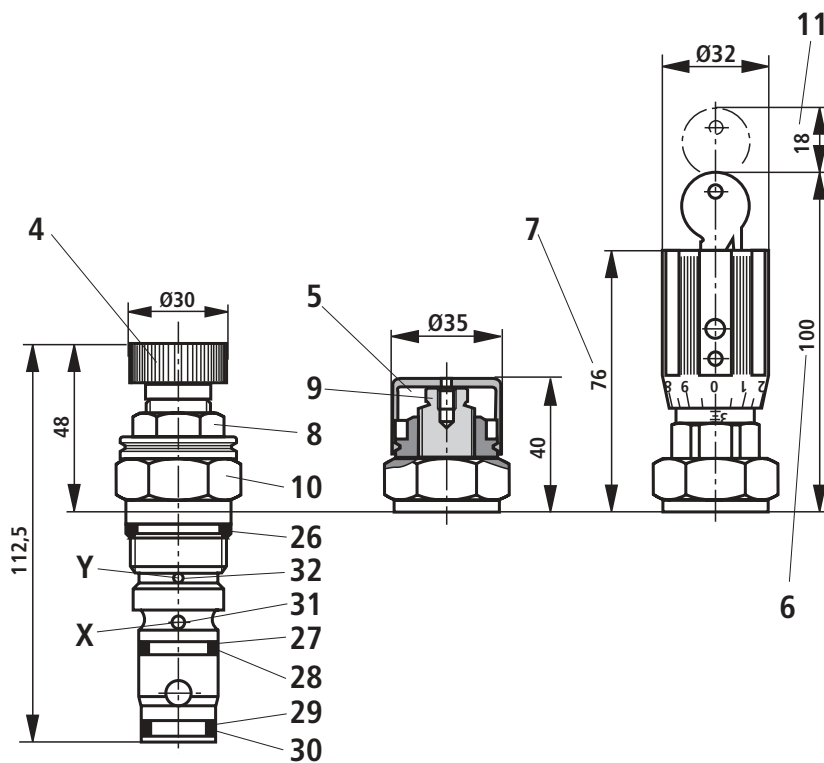

- 4 Adjustment element "1"
- 5 Adjustment element "2"
- 6 Adjustment element "3"
- 7 Adjustment element "7"
- 8 Locknut 22A/F
- 9 Hexagon 10A/F
- 10 Hexagon 30A/F
tightening torque
 $M_A = 50 \text{ Nm}$
- 11 Space required to remove the key
- 26 Seal ring
- 27 Seal ring ²⁾
- 28 Back-up ring ²⁾
- 29 Seal ring
- 30 2 back-up rings
- 31 Drilling for port "X" **not** provided for type DB 20 K...1X/..Y..
- 32 Drilling for port "Y" provided for type DB 20 K...1X/..XY and type DB 20 K...1X/..Y

Cartridge valve mounting cavity

Version "XY" and design tested valves DB 20 K...Y..E (without X port)

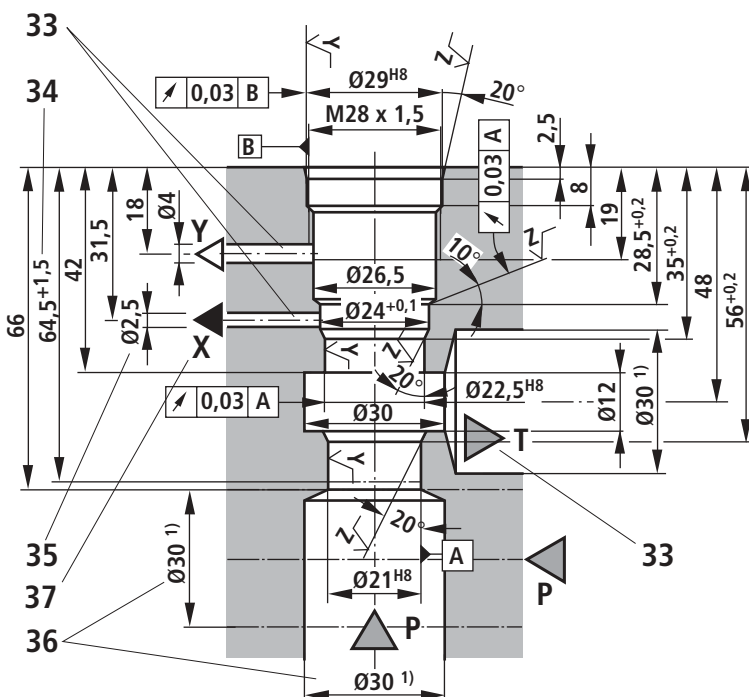


- 33 Drilling X, Y and T optional about the circumference with type DB 20 K...1X/..XY..
Drilling B optional about the circumference with type DB 20 K...1X/..Y..
- 34 Depth of fit
- 35 Drilling Ø 2.5 only when required

- 36 Drilling P, optional
- 37 Port „X“ for design tested valves type DB 20 K...Y..E **must not** be drilled, is without function!

- ¹⁾ Maximum dimensions
- ²⁾ Deleted with type DB 20 K...1X/..Y..

Cartridge valve mounting cavity

Version "Y" (internal pilot oil supply and pilot oil drain)

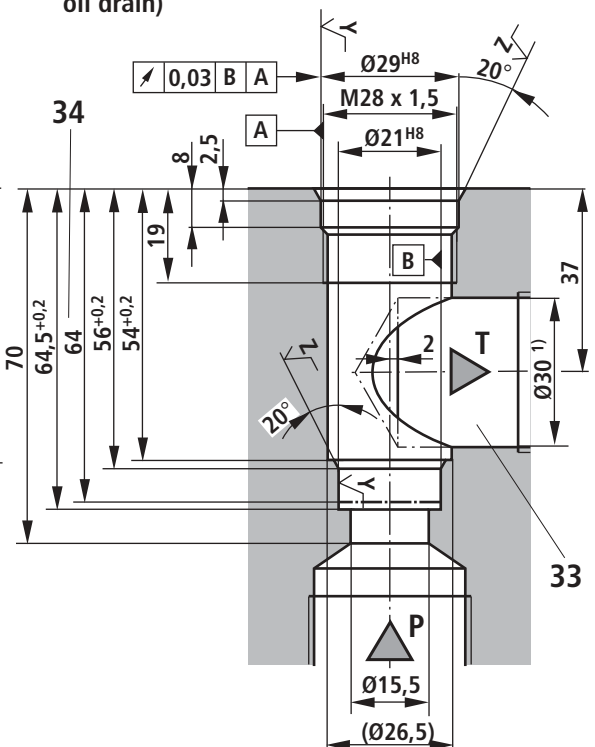

$$Y = \sqrt{R_2 \cdot 8}$$

$$Z = \sqrt{R_2 \cdot 16}$$

Preferred types (readily available)

Type	Material No.
DB 20 K2-1X/50XY	R900470296
DB 20 K2-1X/100XY	R900470297
DB 20 K2-1X/200XY	R900470298
DB 20 K2-1X/315XY	R900493939
DB 10 G2-4X/50W65	R900403149
DB 10 G2-4X/100W65	R900405532
DB 10 G2-4X/200W65	R900404262
DB 10 G2-4X/315W65	R900441994
DB 10-2-4X/50W65	R900517879
DB 10-2-4X/100W65	R900593404
DB 10-2-4X/200W65	R900368564
DB 10-2-4X/315W65	R900592765
DB 10-2-4X/350W65	R900597122
DB 20 G2-4X/50W65	R900479678
DB 20 G2-4X/100W65	R900407106
DB 20 G2-4X/200W65	R900401564
DB 20 G2-4X/315W65	R900423704
DB 20 G2-4X/350W65	R900402410
DB 20-2-4X/50W65	R900503495
DB 20-2-4X/200W65	R900503250
DB 20-2-4X/315W65	R900592968
DB 20-2-4X/315XW65	R900510838
DB 20-2-4X/350W65	R900593586

Further preferred types and standard units can be found in the EPS (Standard Price list).

Bosch Rexroth AG Industrial Hydraulics

D-97813 Lohr am Main
Zum Eisengießer 1 • D-97816 Lohr am Main
Telefon 0 93 52 / 18-0
Telefax 0 93 52 / 18-23 58 • Telex 6 89 418-0
eMail documentation@boschrexroth.de
Internet www.boschrexroth.de

Bosch Rexroth Limited

Cromwell Road, St Neots
Cambs, PE19 2ES
Tel: 0 14 80/22 32 56
Fax: 0 14 80/21 90 52
E-mail: info@boschrexroth.co.uk

The data specified above only serves to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The details stated do not release you from the responsibility for carrying out your own assessment and verification. It must be remembered that our products are subject to a natural process of wear and ageing.