

**RE 28 389/02.03**

Replaces: 11.02

**2-way flow control valve**  
**Types 2FRM..., 2FRH... and 2FRW...**

Nominal sizes 10 and 16

Series 3X

Maximum operating pressure 315 bar

Maximum flow 160 L/min



H5552

Type 2FRM 10 -3X/...

**Overview of contents**

Contents	Page
Features	1
Ordering details	2
Symbols	2, 3
Preferred types	4
Function, section	4, 5
Technical data	6 and 7
Characteristic curves	8
Unit dimensions	9 to 11
Plug-in connector ordering details	12

**Features**

- For subplate mounting, Porting pattern to DIN 24 340 Form G, ISO 6263 and CETOP–RP 121 H, Subplates to catalogue sheet RE 45 066 (separate order)
- Mechanical operation (type 2FRM..)
- Hydraulic operation (type 2FRH..)
- Electro-hydraulic operation (type 2FRW..)
- Pressure compensator stroke limiter, optional
- Start-up jump reduction
- Adjustable stroke limiter for the rack and pinion actuator (types 2FRH.. and 2FRW..)
- Flow control in both directions using a rectifier sandwich plate
  
- For further information see:
 



Pilot valves	
High performance directional valves	RE 23 178
Subplates	RE 45 066



© 2003  
by Bosch Rexroth AG, Industrial Hydraulics, D-97813 Lohr am Main

All rights reserved. No part of this document may be reproduced or stored, processed, duplicated or circulated using electronic systems, in any form or by means, without the prior written authorisation of Bosch Rexroth AG. In the event of contravention of the above provisions, the contravening party is obliged to pay compensation.

## Ordering details: 2-way flow control valve


<b>2FR</b>		<b>-3X</b> /			<b>1)</b>	<b>1)</b>	<b>1)</b>	<b>1)</b>	<b>1)</b>		<b>*</b>
2-way flow control valve											Further details in clear text
Mechanical operation = <b>M</b>											<b>No code</b> = NBR seals <b>V</b> = FKM seals (other seals on request) <b>⚠ Attention!</b> The compatibility of the seals and pressure fluid has to be taken into account! <b>Electrical connections</b> <b>K4</b> <sup>2)</sup> = <b>Without</b> plug-in connector with component plug DIN EN 175 301-803  <b>No code</b> = <b>Without</b> hand override <b>N9</b> = <b>With protected</b> hand override <b>N</b> = <b>With</b> hand override
Hydraulic operation = <b>H</b>											
Electro-hydraulic operation = <b>W</b>											
Nominal size 10 = <b>10</b>											<b>G24</b> = 24 DC <b>W220-50</b> = 220 V AC 50 Hz (for other voltages and frequencies see RE 23 178)
Nominal size 16 = <b>16</b>											
Series 30 to 39 = <b>3X</b> (30 to 39: unchanged installation and connection dimensions)											<b>Y</b> =  <b>J</b> = 
<b>Flow range A to B</b>											
<b>NS 10, linear</b>											<b>Symbols with cross-over position (switching characteristics)</b> <b>Symbols</b>
Up to 10 L/min = <b>10L</b>											
Up to 16 L/min = <b>16L</b>											
Up to 25 L/min = <b>25L</b>											
Up to 50 L/min = <b>50L</b>											<b>1)</b> These ordering details <b>only</b> have to be entered for the electro-hydraulic operation type 2FRW! <b>2)</b> Plug-in connectors must be ordered separately (see page 12)
<b>NS 16, linear</b>											
Up to 60 L/min = <b>60L</b>											
Up to 100 L/min = <b>100L</b>											
Up to 160 L/min = <b>160L</b>											
<b>Without</b> pressure compensator stroke limiter = <b>No code</b> <b>With</b> pressure compensator stroke limiter = <b>B</b> <b>Without</b> actual value potentiometer = <b>No code</b> <b>With</b> actual value potentiometer = <b>P</b> (not available for type 2FRM) Directional valve NS 6 with wet pin solenoid = <b>6A</b>											

Preferred types, see page 4, are readily available

## Ordering details: rectifier sandwich plate

<b>Z4S</b>			<b>*</b>	
Nominal size 10 = <b>10</b>				Further details in clear text
Nominal size 16 = <b>16</b>				
Series 30 to 39 ( <b>NS 10</b> ) = <b>3X</b> (30 to 39: unchanged installation and connection dimensions)				<b>No code</b> = NBR seals <b>V</b> = FKM seals (other seals on request) <b>⚠ Attention!</b> The compatibility of the seals and pressure fluid has to be taken into account!
Series 20 to 29 ( <b>NS 16</b> ) = <b>2X</b> (20 to 29: unchanged installation and connection dimensions)				

**Symbol:** rectifier sandwich plate (① = component side, ② = subplate side)

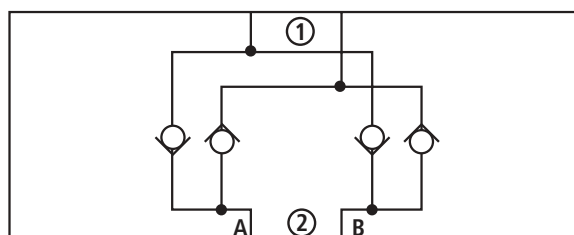

**Symbols:** 2-way flow control valve

	Simplified	Detailed
Type 2FRM		
Type 2FRM		
Type e2FRM		
Type 2FRM		<p>Solenoid "a" energised flow controller <math>q_{V \min}</math></p> <p>Solenoid "b" energised flow controller <math>q_{V \max}</math></p> <p>Symbol J</p> <p>Symbol Y optional</p>
Type 2FRM		<p>Solenoid "a" energised flow controller <math>q_{V \min}</math></p> <p>Solenoid "b" energised flow controller <math>q_{V \max}</math></p> <p>Symbol J</p> <p>Symbol Y optional</p>

## Preferred types (readily available)

Type	Material No.
2FRM 16-3X/60L	R900423271
2FRM 16-3X/100L	R900424905
2FRM 16-3X/160L	R900424906

Further preferred types and standard units can be found in the EPS (Standard Price List).

## Function, section

Flow control valves of types 2FRM.., 2FRH.. and 2FRW.. are 2-way flow control valves. They are used to maintain a flow constant virtually independent of pressure and temperature.

The valves basically consist of the housing (1), orifice bush (2), pressure compensator (3) with optional stroke limiter (3.1), check valve (4), adjustment element (5) for type 2FRM.. as well as a rack and pinion actuator (6), directional valve (7) and actual value potentiometer (8) for types 2FRH... and 2FRW..


The flow from port A to port B is throttled at the orifice (9). On type 2FRM.. the throttling area is adjusted by rotating the curved pin (10) mechanically by means of the adjustment element (5), for types 2FRH.. and 2FRW.. hydraulically via a rack and pinion actuator (6), which is controlled by a built-on electrically operated directional valve (7). The control speed can be set by means of throttle check valves (6.3 and 6.4). In order to limit the required actuating range, the rack and pinion actuator (6) is fitted with adjustable stroke limiters on both ends (6.1 and 6.2). In order to maintain the flow across the orifice (9) constant, a pressure compensator is connected upstream of the orifice (3).

The flow is maintained largely independent of temperature due to the orifice design.


Free return flow from port B to port A is via the check valve (4).

In order to permit the orifice position in valve types 2FRH.. and 2FRW.. to be continuously monitored, an actual value potentiometer (8) can be fitted. Suitable electrical control components are available for electrical command value pre-selection.


The flow is only controlled from A to B. In order to control the flow in both directions a rectifier sandwich plate type Z4S (supply and return) can be installed under the flow control valve.

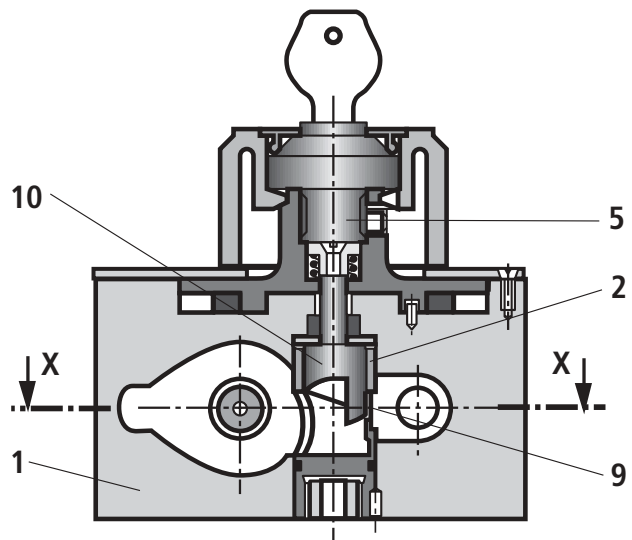


Type 2 FRM...

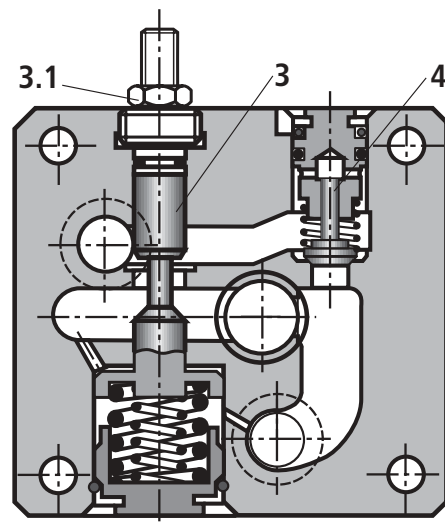

Section X-X

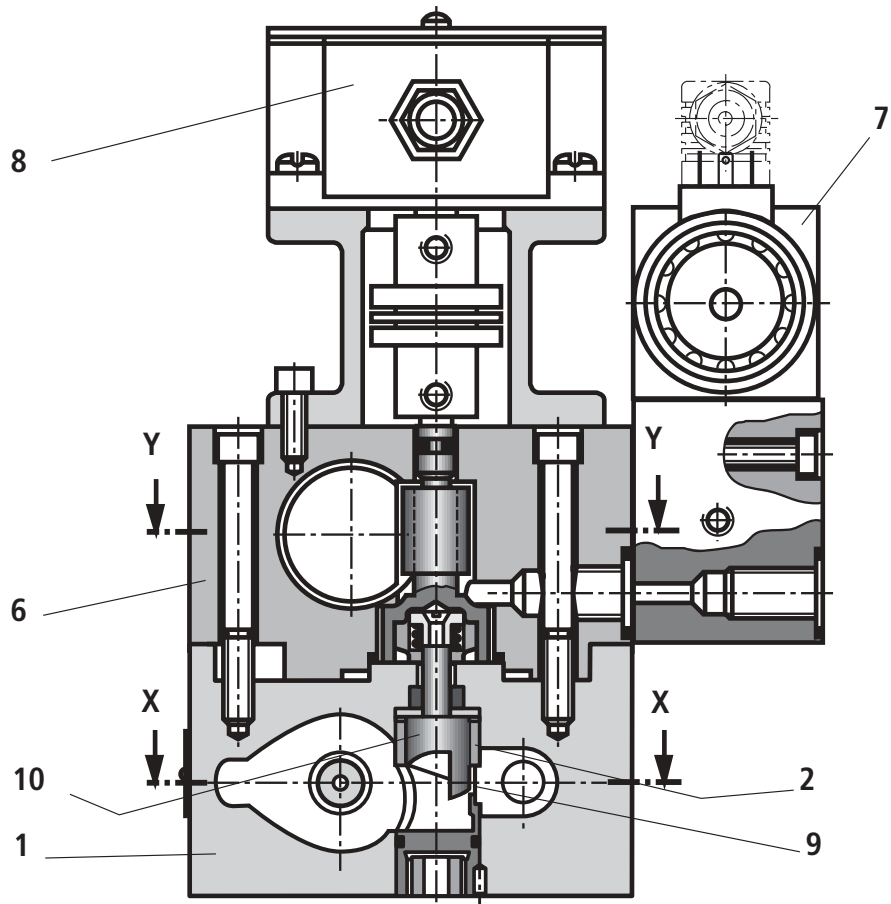

Type 2FRW...P...

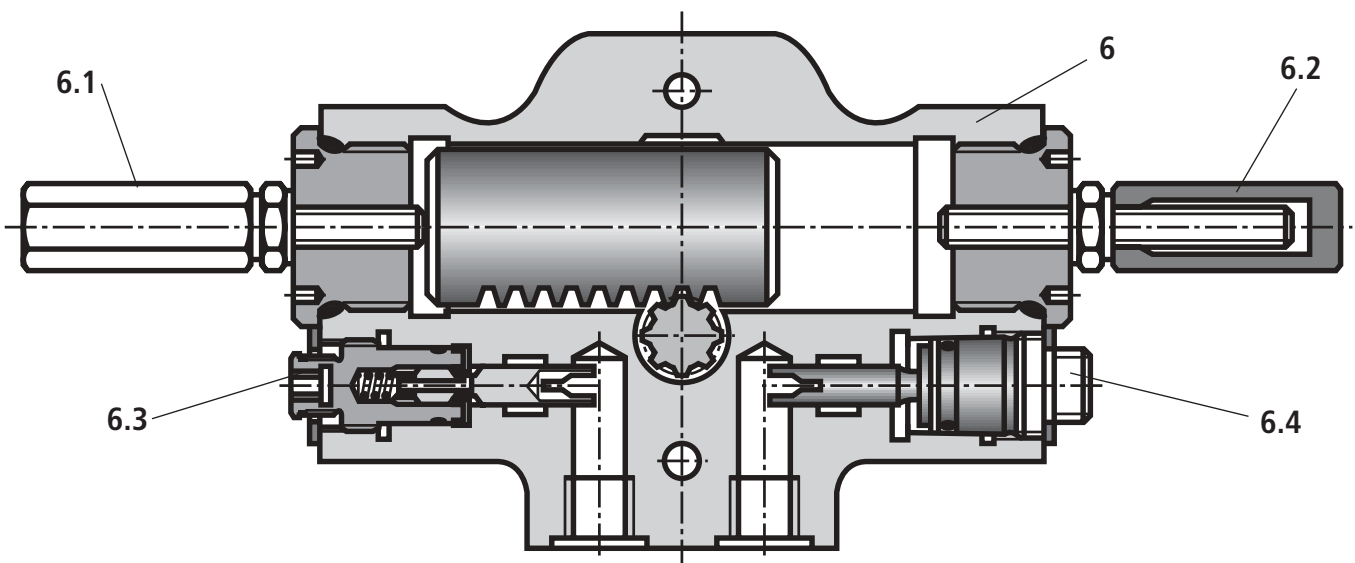

Section Y-Y (rotated through 90°)

**Technical data** (for applications outside these parameters, please consult us!)**General**

Weight			<b>NS 10</b>	<b>NS 16</b>
	Type 2FRM	kg	5.6	11.3
	Type 2FRH	kg	9.2	14.9
	Type 2FRH..P	kg	10.3	16
	Type 2FRW	kg	11.3	17
	Type 2FRW..P	kg	12.4	18.1
	Rectifier sandwich plate	kg	3.0	8.1
Installation			Optional	
Type 2FRM			Optional	
Types 2FRH and 2FRW			Actuator horizontal (rack and pinion)	
Pressure fluid			Mineral oil (HL, HLP) to DIN 51 524 <sup>1)</sup> ; Fast bio-degradable pressure fluids to VDMA 24 568 (also see RE 90 221); HETG (rape seed oil) <sup>1)</sup> ; HEPG (polyglycole) <sup>2)</sup> ; HEES (Synthetic ester) <sup>2)</sup> ; other pressure fluids on request	
Ambient temperature range			–30 to +80 (–30 to +50 <b>for</b> type 2FRW)	
	NBR seals	°C	–30 to +80 (–30 to +50 <b>for</b> type 2FRW)	
	FKM seals	°C	–20 to +80 (–20 to +50 <b>for</b> type 2FRW)	
Pressure fluid temperature range			–30 to +80	
	NBR seals	°C	–30 to +80	
	FKM seals	°C	–20 to +80	
Viscosity range			10 to 800	
ISO code cleanliness class			Maximum permissible degree of contamination of the pressure fluid is to ISO 4406 (C) class 20/18/15 <sup>3)</sup>	

<sup>1)</sup> Suitable for NBR **and** FKM seals

<sup>2)</sup> **Only** suitable for FKM seals

<sup>3)</sup> The cleanliness class stated for the components must be adhered too in hydraulic systems. Effective filtration prevents faults from occurring and at the same time increases the component service life.  
For the selection of filters see catalogue sheets RE 50 070, RE 50 076 and RE 50 081.

**Technical data** (for applications outside these parameters, please consult us!)

**2-way flow control valves types 2FRM..., 2FRH... and 2FRW...**

		NS 10				NS 16		
Maximum flow	L/min	10	16	25	50	60	100	160
Pressure differential with free-flow from B to A, $q_V$ dependent	bar	2	2.5	3.5	6	2.8	4.3	7.3
Minimum pressure differential	bar	3 to 7				5 to 12		
Flow control	• Temperature, stable (-20 to +80°C)	$\pm 2\% (q_{V \max})$				$\pm 2\% (q_{V \max})$		
	• Pressure, stable (up to $Dp = 315$ bar)	$\pm 2\% (q_{V \max})$				$< \pm 5\% (q_{V \max})$		
Maximum operating pressure, port A	bar	315						

**2-way flow control valves types 2FRH... and 2FRW...**

Pilot volume for the max. adjustment range	cm <sup>3</sup>	22 (300°)	
Pilot pressure range	bar	10 to 100 (max. value must <b>not</b> be exceeded!)	
Adjustment speed (dependent on the pilot pressure)		<b>Without</b> potentiometer	<b>With</b> potentiometer
(Dependent on the pilot pressure)		5 to 2000°/s	5 to 300°/s
Maximum flow (directional valve)	L/min	10	See RE 23 178
Maximum operating pressure (directional valve)	bar	Up to 315	See RE 23 178





**Potentiometer**

		Actual value potentiometer
Resistance	$\Omega$	1000
Loadability	W	5
Maximum wiper current	A	0.12
Protection to DIN 40 050		IP 65
Adjustment end position error (dependent on the adjustment speed)		$\pm 1.5^\circ$ at 10°/s

**Rectifier sandwich plate Z4S...**



Flow, max.	L/min	50	160
Operating pressure, max.	bar	315	
Opening pressure	bar	1.5	

**Characteristic curves** (measured with HLP46,  $\vartheta_{oil} = 40\text{ °C} \pm 5\text{ °C}$ )

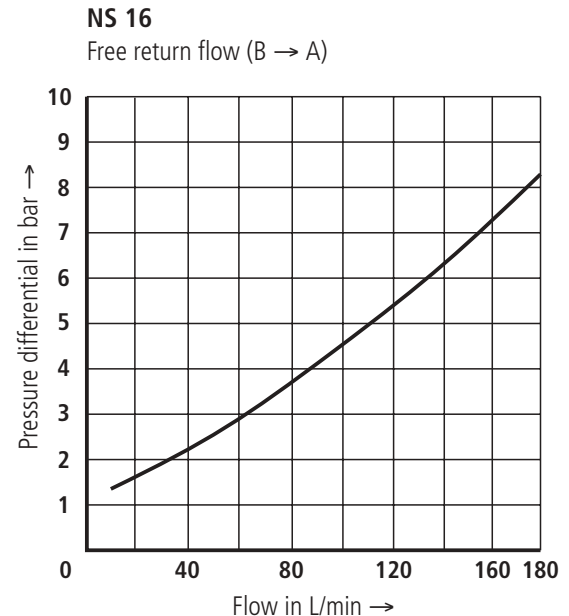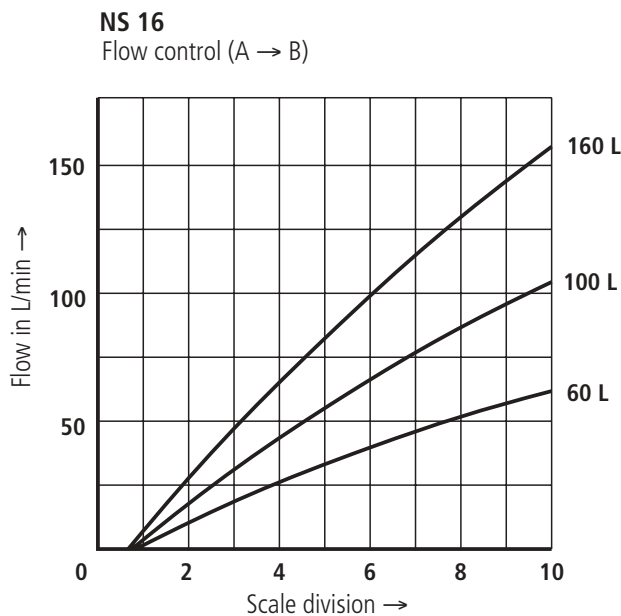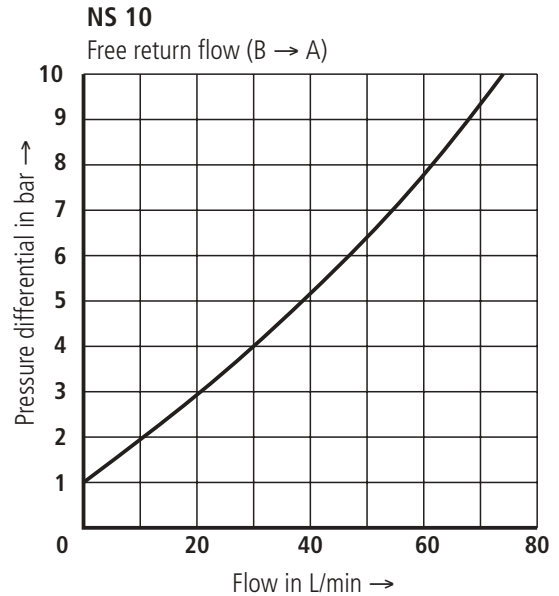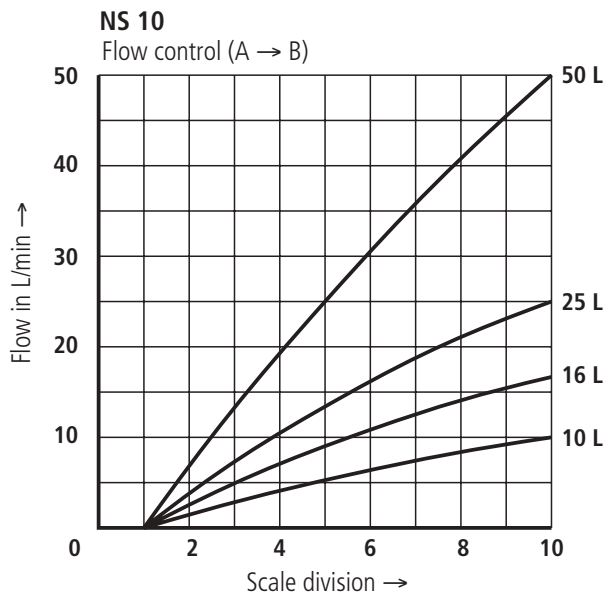

**Characteristic curves: rectifier sandwich plate** (measured with HLP46,  $\vartheta_{oil} = 40\text{ °C} \pm 5\text{ °C}$ )


Pressure differential  $\Delta p$  is the same for both directions of flow  $q_v$  from A to B (B to A)

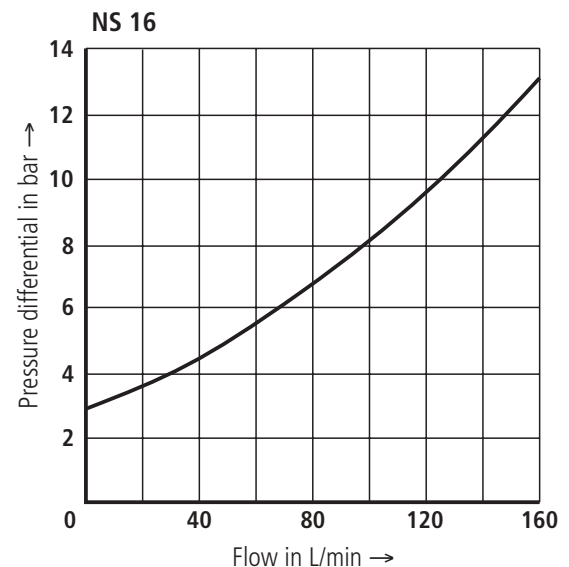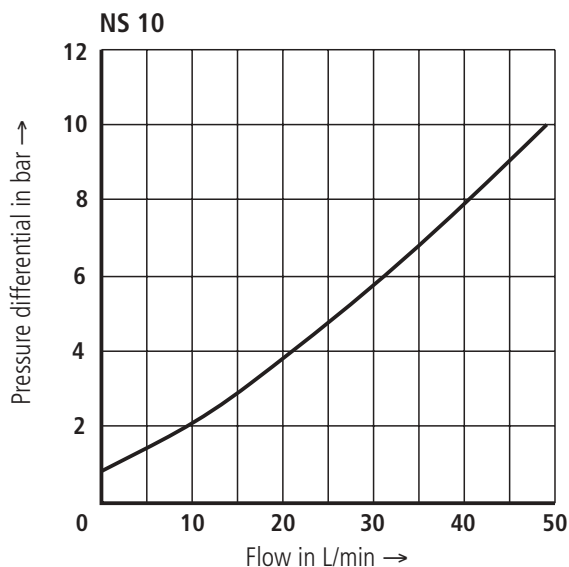



**Unit dimensions:** 2-way flow control valve type 2FRM (dimensions in mm)

- 1 Pressure compenstor stroke limiter, optional
- 2 Adjustment element, lockable rotary knob  
(may be locked in any position)  
Turning range  $300^\circ = 10$  scale divisions  
 $M_d \approx 0.7$  Nm
- 6 Name plate
- 7 Input "A"
- 8 Output "B"
- 9 Seal ring
- 10.1 Locating pin (NS 10 and 16)
- 10.2 Locating pin (NS 16)
- 18 Hexagon 10A/F
- 19 Internal hexagon 3A/F


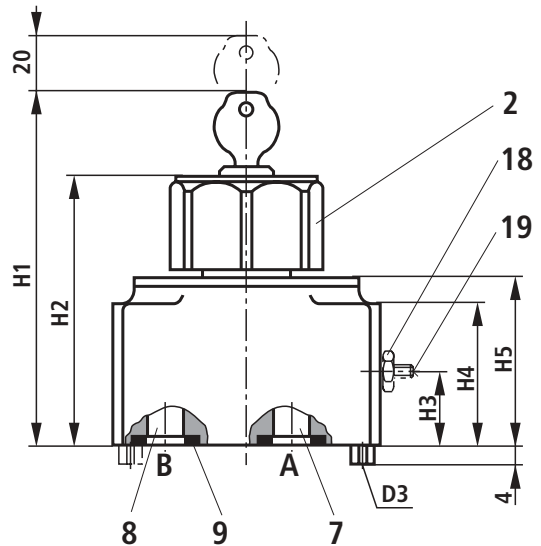


**Subplates for:**

- Nominal size 10: G 279/01 (G 1/2)  
G 280/01 (G 3/4)
  - Nominal size 16: G 281/01 (G 1)  
G 282/01 (G 1 1/4)
- to catalogue sheet RE 45 066 and

**Valve fixing screws**

- Nominal size 10  
M8 x 50 DIN 912-10.9;  $M_A = 37$  Nm
  - Nominal size 16  
M10 x 80 DIN 912-10.9;  $M_A = 75$  Nm
- must be ordered separately.

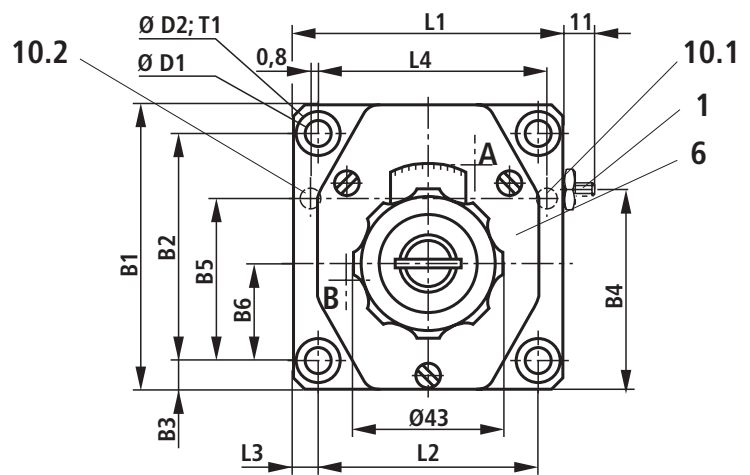


Required surface finish of the mating piece

NS	B1	B2	B3	B4	B5	B6	Ø D1	Ø D2	D3	H1	H2	H3	H4	H5	L1	L2	L3	L4	T1
10	101.5	82.5	9.5	68	58.7	35.5	9	15	6	125	95	26	51	60	95	76	9.5	79.4	13
16	123.5	101.5	11	81.5	72.9	41.5	11	18	6	147	117	34	72	82	123.5	101.5	11	102.4	12


**Unit dimensions:** 2-way flow control valve types 2FRW, 2FRH (dimensions in mm)

- 1 Pressure compensator stroke limiter, optional
- 2 Flow indicator, rotation range 300° = 10 scale divisions
- 3.1 Rack and pinion actuator stroke limiter for min. flow 1 turn = approx. 12° (von 300°)
- 3.2 Rack and pinion actuator stroke limiter for max. flow 1 turn = approx. 12° (of 300°)
- 4 Directional valve NS 6, symbols J or Y (Y de-energised =  $q_{V\ min}$ )  
For detailed dimensions of the directional valve, see RE 23 178
- 4.1 Cover for valve type Y
- 5 Actual value potentiometer
- 6 Name plate
- 7 Input "A"
- 8 Output "B"
- 9 Seal ring
- 10.1 Locating pin (NS 10 and 16)
- 10.2 Locating pin (NS 16)
- 11.1 Speed adjustment throttle towards min. flow ( $v_0$  to  $v_{max.} = 5$  turns); Internal hexagon 6A/F
- 11.2 Speed adjustment throttle towards max. flow ( $v_0$  to  $v_{max.} = 5$  turns); Internal hexagon 6A/F
- 12.1 Pressure in X = opening of the orifice
- 12.2 Pressure in Y = closing of the orifice
- 13 Scale disc
- 18 Hexagon 10A/F
- 19 Internal hexagon 3A/F
- 20 Hexagon 13A/F

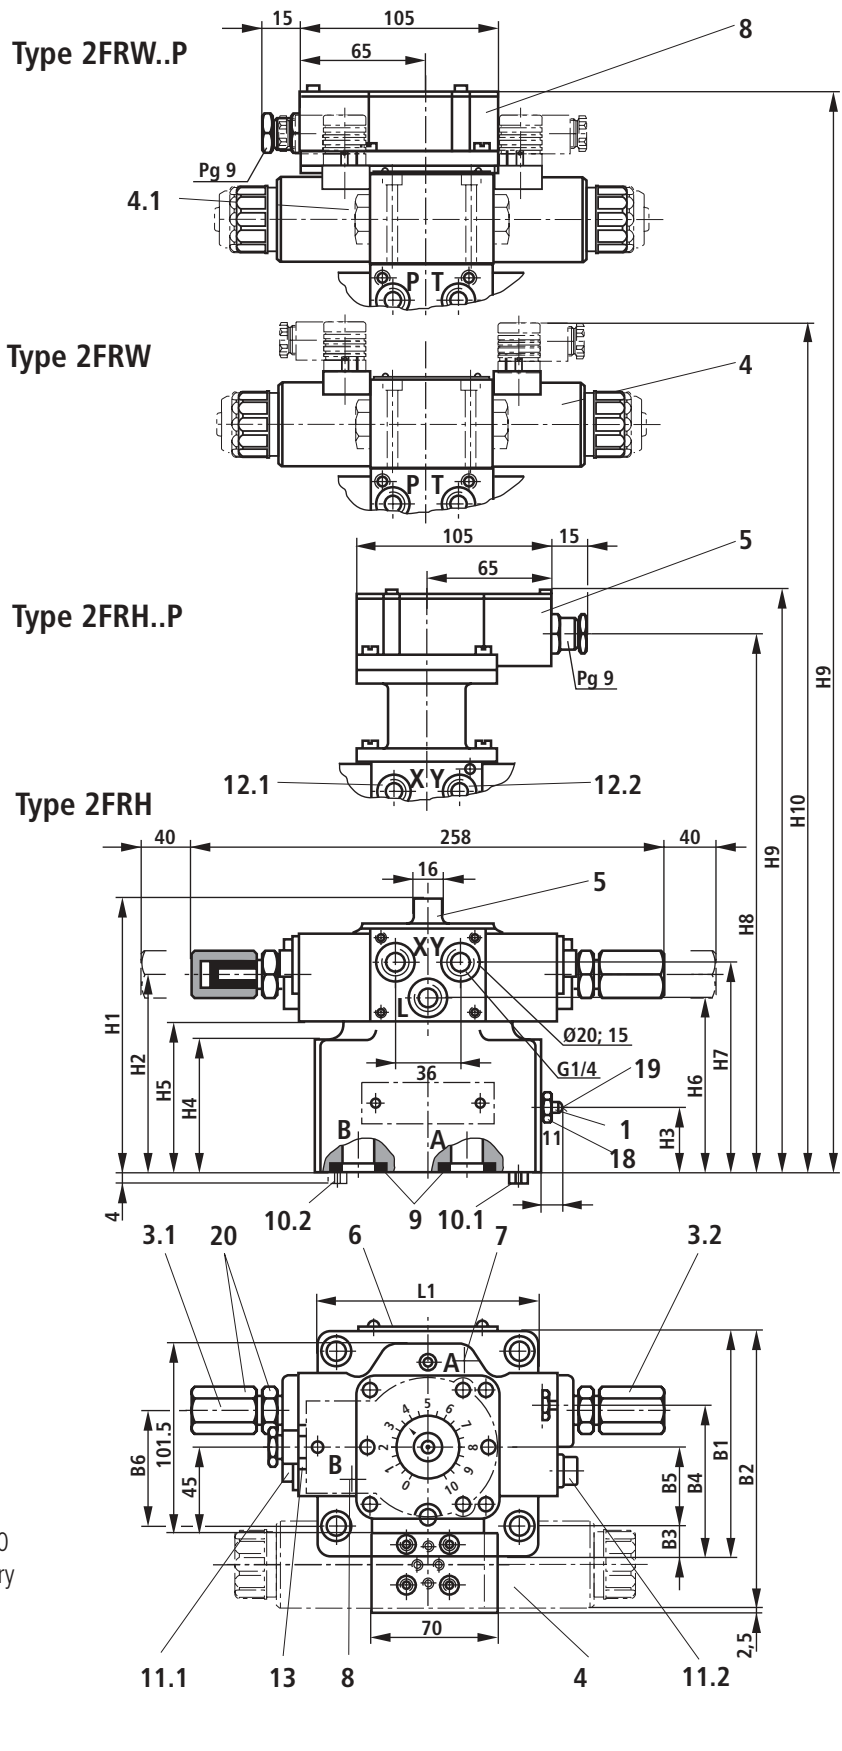








For subplates and valve fixing screws and valve connection dimensions see page 9.

- 1) Type 2FRH
- 2) Type 2FRW
- 3) Dimension with plug-in connection **without** circuitry to DIN EN 175 301–802 and ISO 4400
- 4) Dimension with plug-in connector **with** circuitry to DIN EN 175 301–802 and ISO 4400

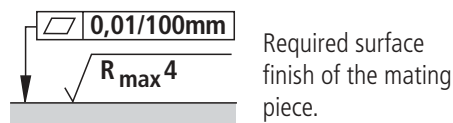

NS	B1	B2	B3	B4	B5	B6	H1	H2	H3	H4	H5	H6	H7 <sup>1)</sup>	H7 <sup>2)</sup>	H8	H9	H10 <sup>3)</sup>	H10 <sup>4)</sup>	L1
10	101.5	146	9.5	68	35.5	54.5	125.5	84	26	51	58	70	89	87	179	203	201	206	95
16	123.5	160.5	11	81.5	41.5	60.5	147.5	106	34	72	80	92	111	109	201	225	223	228	123.5

**Unit dimensions:** rectifier sandwich plate Z4S... (dimensions in mm)

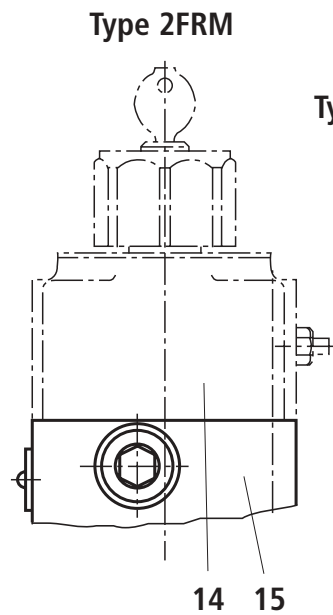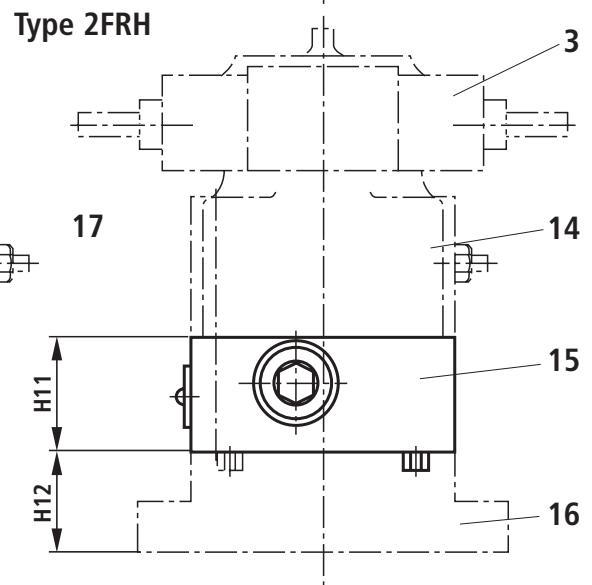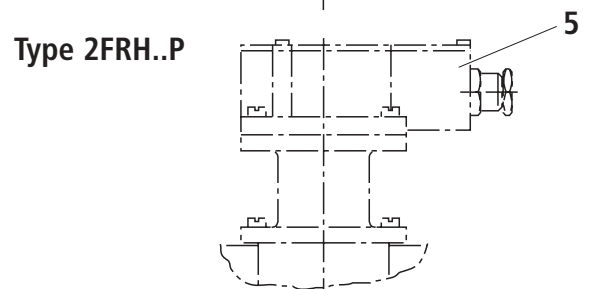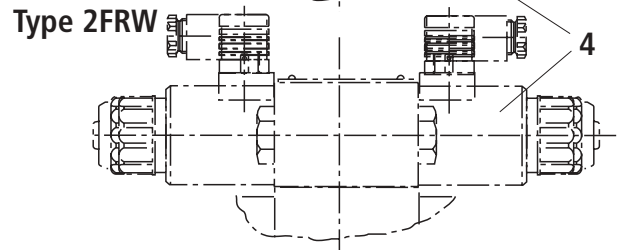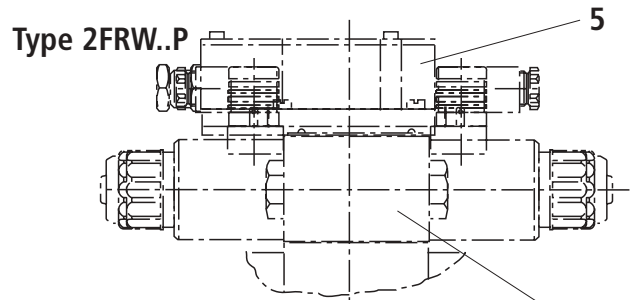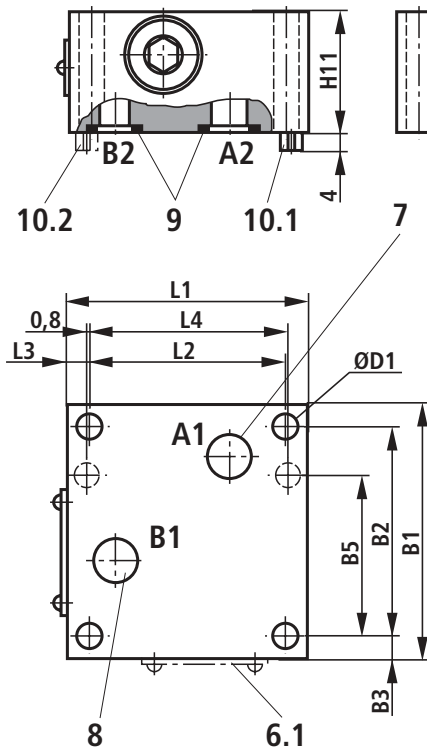


- 3 Rack and pinion actuator
- 4 Directional valve NS 6
- 5 Actual value potentiometer
- 6 Name plate (NS 10)
- 6.1 Name plate (NS 16)
- 7 Input "A"
- 8 Output "B"
- 9 Seal ring
- 10.1 Locating pin (NS 10 and 16)
- 10.2 Locating pin (NS 16)
- 14 2-way flow control valve
- 15 Rectifier sandwich plate
- 16 Subplates, see page 6
- 17 **Valve fixing screws**

Nominal size 10:  
M8 x 100 DIN 912-10.9;  $M_A = 37 \text{ Nm}$

Nominal size 16:  
M10 x 160 DIN 912-10.9;  $M_A = 75 \text{ Nm}$



Valve fixing screws for inserting a rectifier sandwich plate between the flow control valve and subplate must be ordered separately.



Required surface finish of the mating piece

NS	B1	B2	B3	B5	ØD1	H11	H12	L1	L2	L3	L4
10	101.5	82.5	9.5	58.7	9	50	30	95	76	9.5	79.4
16	123.5	101.5	11	72.9	11	85	40	123.5	101.5	11	102.4

**Ordering details:** plug-in connectors to DIN EN 175 301-803 and ISO 4400 for component plug "K4"

For further plug-in connectors see RE 08 006					
		<b>Material No.</b>			
Valve side	Colour	Without circuitry	With indicator light 12 ... 240 V	With rectifier 12 ... 240 V	With indicator light and Z-diode protective circuitry 24 V
a	Grey	<b>R900074683</b>	–	–	–
b	Black	<b>R900074684</b>	–	–	–
a/b	Black	–	<b>R900057292</b>	<b>R900313933</b>	<b>R900310995</b>

**Bosch Rexroth AG  
Industrial Hydraulics**

D-97813 Lohr am Main  
Zum Eisengießer 1 • D-97816 Lohr am Main  
Telefon 0 93 52 / 18-0  
Telefax 0 93 52 / 18-23 58 • Telex 6 89 418-0  
eMail [documentation@boschrexroth.de](mailto:documentation@boschrexroth.de)  
Internet [www.boschrexroth.de](http://www.boschrexroth.de)

**Bosch Rexroth Limited**

Cromwell Road, St Neots  
Cambs, PE19 2ES  
Tel: 0 14 80/22 32 56  
Fax: 0 14 80/21 90 52  
E-mail: [info@boschrexroth.co.uk](mailto:info@boschrexroth.co.uk)

The data specified above only serves to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The details stated do not release you from the responsibility for carrying out your own assessment and verification. It must be remembered that our products are subject to a natural process of wear and ageing.